

UB62 Inline Tile Vent Ludlow Plus /49 (GSA)



Product features and benefits

- High performance yet aesthetically pleasing
- Injection moulded construction
- Suitable for use with Redland 49, Marley Ludlow Plus, Sandtoft Standard, Forticrete V2 (old van guard)

Application

- High or low level roof void ventilation
- Mechanical extraction when used with the Stepped Adaptor
- Minimum pitch of 25°

Material

- Polypropylene

Dimensions

- L: 395mm x W: 232mm

Weight


- 0.5 kg (including clip) per unit
- 6 kg per box

Packaging

- 12 per box

Performance

- Provides 10,000mm² free vent area

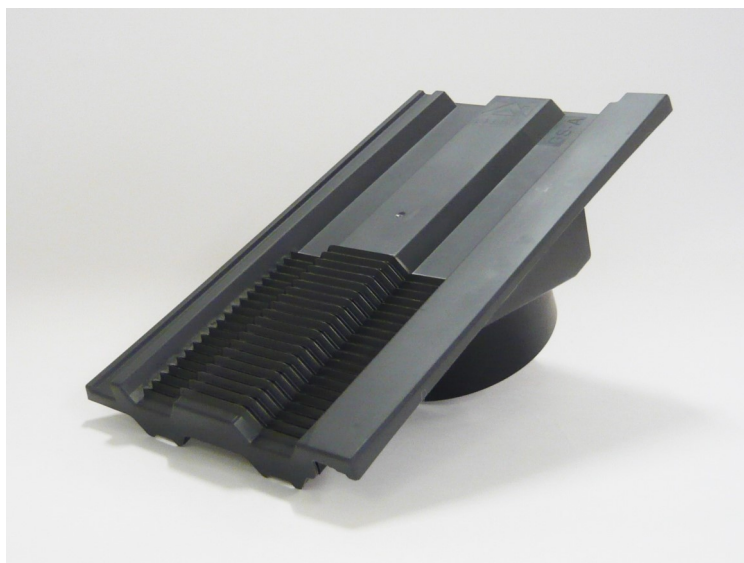

Colours

- Red
- Terracotta
- Anthracite
- Sepia

Product Code

- Red 294919
- Terracotta 294920
- Anthracite 294918
- Sepia 294921

NB: To convert to a terminal please add the Stepped Adaptor 544180

Spacing	5mm	10mm	25mm
M Centres	2	1	0.4